



D 600 APG
D 700 AP
D 1000 AP
D 1000 APG



www.ausa.com

AUSA Center, S.L.U. ● Ctra. de Vic, Km 2.8 - P.O.B. 194. 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 - E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid ● Pol. Ind. Coslada - C. Marconi 15-17. 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
AUSA France ● Z. I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
AUSA Deutschland ● Heinrich - Welken Str. 5. 59069 HAMM (GERMANY) Tel.: +49 (0) 2385-9359362 - E-mail: ausa.deutschland@ausa.com
BEIJING Rep. Office ● Address Room 527. HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - BEIJING 100026 (CHINA)
 Tel.: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com

AUSA UK ● Tel.: 07970639988 - E-mail: ausa.uk@ausa.com

AUSA Brasil ● Tel.: +55 51 33622111 - E-mail: ausa.brasil@ausa.com

AUSA Mexico ● Gustavo Baz, 47. 53489 Naucalpan de Juarez, Edo. de México (MÉXICO) Tel.: +55 2166-9066 - E-mail: ausa.mexico@ausa.com




D 600 APG _6.000 Kg
D 700 AP _7.000 Kg
D 1000 AP _10.000 Kg
D 1000 APG _10.000 Kg



DIMENSIONS (mm)	D 600 APG	D 700 AP	D 1000 AP	D 1000 APG
A	2150	2405	2480	2480
B	2070	1960	2380	2385
C	2190	2190	2440	2440
E	1790	1730	1820	1950
F	3180	3180	3560	3560
G	475	475	490	490
H	970	970	1260	1230
I	2450	2450	2450	2450
J	1125	1125	1220	1220
K	4615	4465	4520	4990
L	3600	2680	2710	3820
M	415	650	665	630
N	1200	455	430	1100
T	3000 / 2850 (*)	3000 / 2850 (*)	3375 / 3220 (*)	3375 / 3220 (*)
U	90	-	-	110
W	2190	2190	2550	2550

(*) Closed cabin

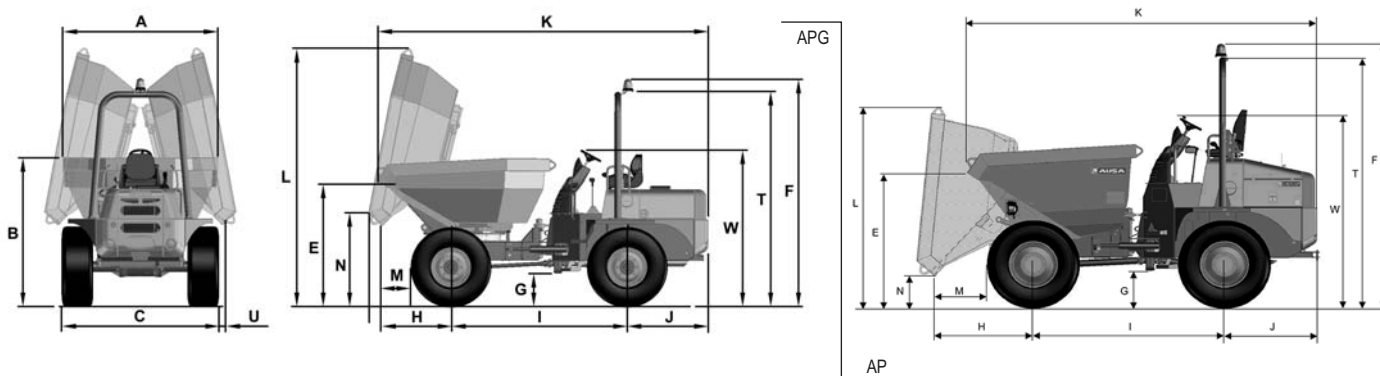

TECHNICAL SPECIFICATIONS

		D 600 APG	D 700 AP	D 1000 AP	D 1000 APG
Load capacity (Kg)		6000	7000	10000	10000
Unloading system		Hydraulic, 180° side rotating	Hydraulic, frontal		Hydraulic, 180° side rotating
Chassis		Articulated and oscillating			
Hopper capacities (l)	Water	1640	2048	2440	2491
	Levelled	2603	2827	3750	3941
	Heaped	3132	3521	5225	5944
Engine	Diesel / Turbodiesel (D900/D1000)	KUBOTA V3600T		KUBOTA V3800 T	
	Power acc./SAE J1995 (KW/HP)	63 / 86		72.8 / 99	
	N° of Cylinders	4			
	Cooling system	Water			
Traction		4 x 4 permanent			
Transmission		Torque converter with synchronized gear box. 4 ratios forwards and 4 ratios backwards by means of an electro-hydraulic device. Axles with planetary reduction on differential output			
Engine starting system		Electric			
Speed (max.) (km/h)		35		40	
Unladen weight (Kg)		4380	4200	4760	4990
Gradeability		60%			
Hydraulic circuit		Gear pump of 25 cc. Working pressure 180 bar.			
Tyres	Front	405/70-20" (14 PR)		500/60-22.5" (16PR")	
	Rear	405/70-20" (14 PR)		500/60-22.5" (16PR")	
External turning radius		5700		5950	
Steering		Hydraulic Working pressure 115 bar			
Tank capacity (l)	Fuel	70			
	Hydraulic fluid	65			
Service brake		Oil-immersed, multidisc, hydraulically operated			
Parking brake		Oil-immersed, multidisc, mechanically operated			

STANDARD EQUIPMENT

Ergonomic seat with safety belt
Audible reverse warning
Anti vandal system
Foldable ROPS arch
Rotating beacon

OPTIONAL EQUIPMENT

Closed cabin with heating
Air conditioning
Homologated lighting equipment
Towing hitch
Railway application

MKT20019.05 / 03.2012

AUSA reserves the right to make any changes in the specifications without prior notice.